


Speedseed 1500

The Speedseed models are ideal to overseed large areas quickly. The individual conical ring sections create seed pockets in the soil in which seed is accurately delivered, the holes are then closed with the roller; the additional spike rear roller increases the holes to 1840 per m².

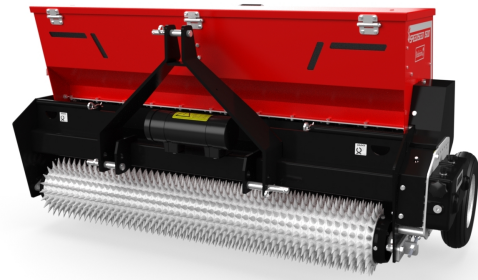

Specifications	
SKU	124.160.006
Working width (m)	1.5
Working width (inch)	59
Max. Working depth (mm)	5 - 20
Max. Working speed (km h)	12
Max. Working speed (mph)	7.5
Weight (kg)	468
Weight (lbs)	1030
Sowing distance (mm)	30
Sowing distance (inch)	1.18
Hopper capacity (L)	224
Hopper capacity (cu.ft.)	7.84
Number of holes single spiked roller (m ²)	990
Number of holes single spiked roller (sq.yd)	1184
Min. Tractor HP required	30
Min. Lifting capacity 610 mm behind the lifting eyes (kg)	550
Min. Lifting capacity 24 inch behind the lifting eyes (lbs)	1212
Three-point hitch	3-point CAT 1-2
Lubricant	EP2